


METALAIRE™

Submittal: TL500-003



Low Profile Single Duct Air Terminal Unit With Integral Attenuator and Electric Heat

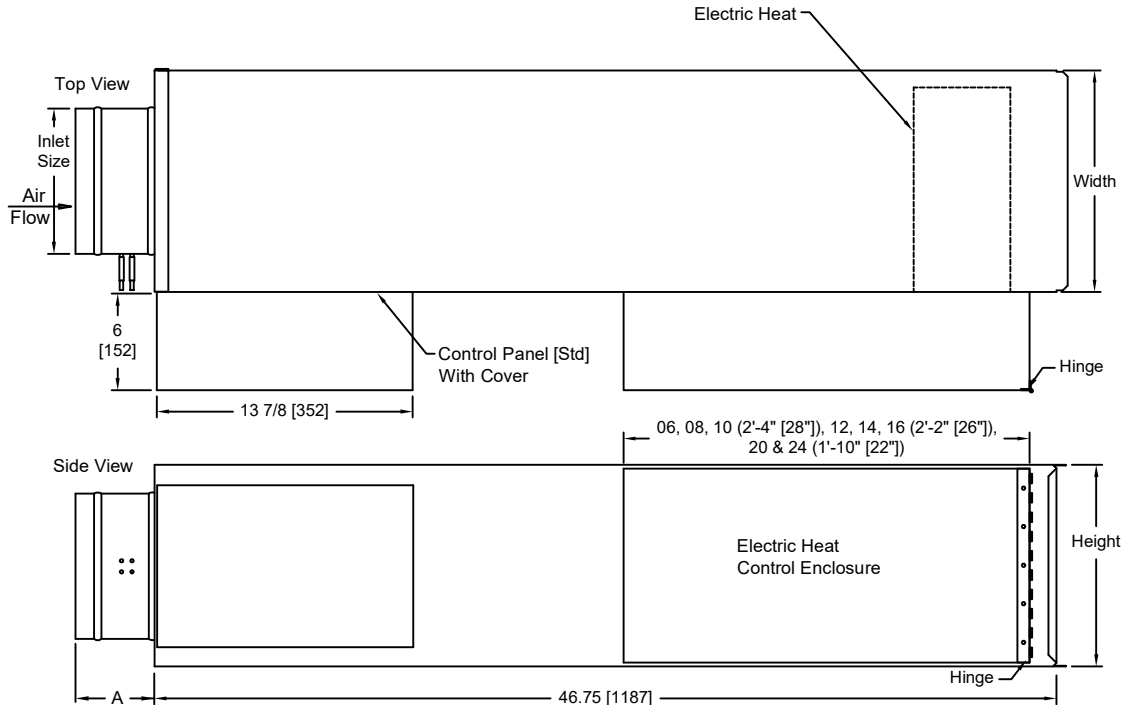


Unit Size	Inlet Size		A		Width		Height		Unit wt.	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	lb.	kg.
4	3 7/8	99	10	254	12	305	8	203	39	18
5	4 7/8	124	5	127	12	305	8	203	39	18
6	5 7/8	149	5	127	12	305	8	203	38	17
7	6 7/8	175	5	127	12	305	10	254	43	20
8	7 7/8	200	5	127	12	305	10	254	43	20
9	8 7/8	226	5	127	14	356	12 1/2	318	50	23
10	9 7/8	251	5	127	14	356	12 1/2	318	50	23
12	13 x 9 7/8	330 x 251	5	127	18	457	12 1/2	318	59	27
14	16 1/4 x 9 7/8	413 x 251	5	127	24	610	12 1/2	318	67	30
16	19 3/8 x 9 7/8	492 x 251	5	127	28	711	12 1/2	318	77	35

The standard location for control panel is Right Hand on Low Profile Single Duct Air Terminal Unit With Integral Attenuator and Electric Heat. Looking in the direction of airflow, the control panel is on the right.

The control panel will overhang the top and bottom of Unit Sizes 4 - 6 1" [25.4 mm] or 1/8" [21 mm] on Unit Size 8 Control Panel Mounting Surface width by height is 13 3/8" x 9 3/8"

Unit Sizes 12, 14, & 16 Have Flat Oval Inlet Ducts

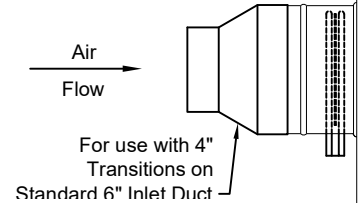

Standard Construction

- | | | |
|---|--|---|
| <ul style="list-style-type: none"> • 1/2" Dual Density, Coated Fiberglass • All Insulations Meet NFPA 90A And UL 181 • All Fiberglass Insulations Have Coated Edges To Prevent Fiber Migration | <ul style="list-style-type: none"> • Units Are Constructed With 22 Gauge Casing & Inlet Duct • 18 Gauge Equivalent Damper Assembly With Integral Blade Seal • Control Panel With Dust Cover | <ul style="list-style-type: none"> • Slip & Drive Discharge Connection • Inlet Airflow Sensor |
|---|--|---|