





### Parallel Fan Powered Air Terminal Unit

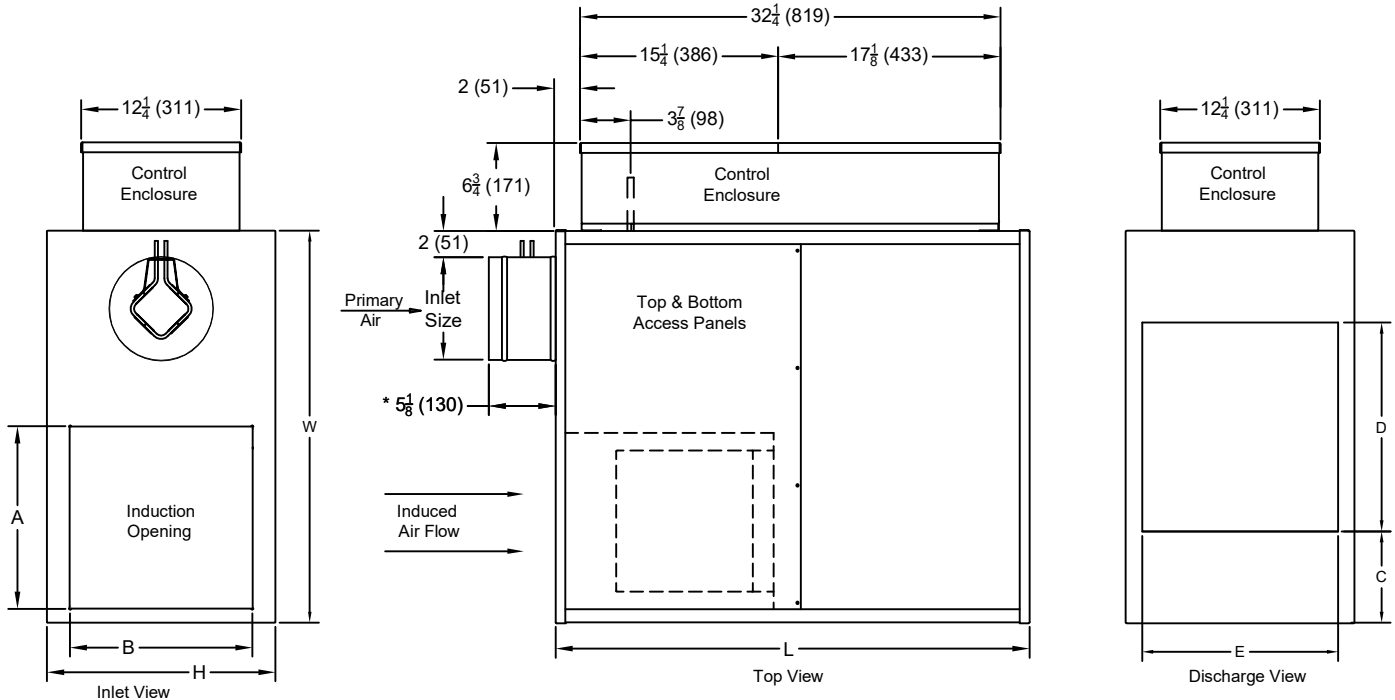

\* 10" Length for 4" Inlet \*

The standard location for control enclosure is Left Hand. Looking in the direction of airflow, the control enclosure is on the left.

All dimensions shown in inches, parentheses ( ) indicate millimeters.

PSC MOTOR CONFIGURATION	
Case Size	Horse Power
1	1/8
2	1/6
3	1/4
4	1/4
5	1/3
6	1/2
7	1

Case Size	Inlet Size		Unit Width W	Unit Height H	Unit Length L	Induction		Discharge		
	Standard	Optional				Width A	Height B	Loc. C	Width D	Height E
1	6 (152)	4, 5, 8, 10	30 (762)	17 1/2 (445)	36 (914)	14 (356)	14 (356)	8 (203)	14 (356)	13 (330)
2	8 (203)	4, 5, 6, 10	30 (762)	17 1/2 (445)	36 (914)	14 (356)	14 (356)	8 (203)	14 (356)	13 (330)
3	10 (254)	4, 5, 6, 8, 12, 14	36 (914)	17 1/2 (445)	40 (1016)	18 (457)	14 (356)	10 (254)	16 (406)	15 1/2 (394)
4	12 (305)	8, 10, 12, 14	36 (914)	17 1/2 (445)	40 (1016)	18 (457)	14 (356)	10 (254)	16 (406)	15 1/2 (394)
5	14 (356)	10, 12, 16	40 (1016)	20 (508)	40 (1016)	18 (457)	16 (406)	11 (279)	18 (457)	15 (4381)
6	16 (406)	10, 12, 14	42 (1067)	20 (508)	42 (1067)	20 (508)	16 (406)	11 (279)	20 (508)	16 (406)
7	16 (406)	12, 14	42 (1067)	20 (508)	42 (1067)	20 (508)	16 (406)	14 (356)	22 (559)	18 (457)

ECM MOTOR CONFIGURATION	
Case Size	Horse Power
1	1/3
2	1/3
3	1/2
4	1/2
5	1
6	1
7	1

#### Standard Construction

- 1" Dual Density, Coated Fiberglass
- All Insulations Meet NFPA 90A And UL 181
- All Fiberglass Insulations Have Coated Edges To Prevent Fiber Migration
- Units Are Constructed With 20 Gauge Casing, 20 Gauge Inlet Duct, and 18 Gauge Discharge.
- 18 Gauge Equivalent Damper Assembly With Integral Blade Seal
- 32 x 12 Control Enclosure
- Optional Slip & Drive Discharge Connection
- Optional Induction Attenuator
- Inlet Airflow Sensor