



Model: PHPSI-6

Supply - Insulated - Lay In T-Bar

PHPSI-6 - Lay In T-Bar

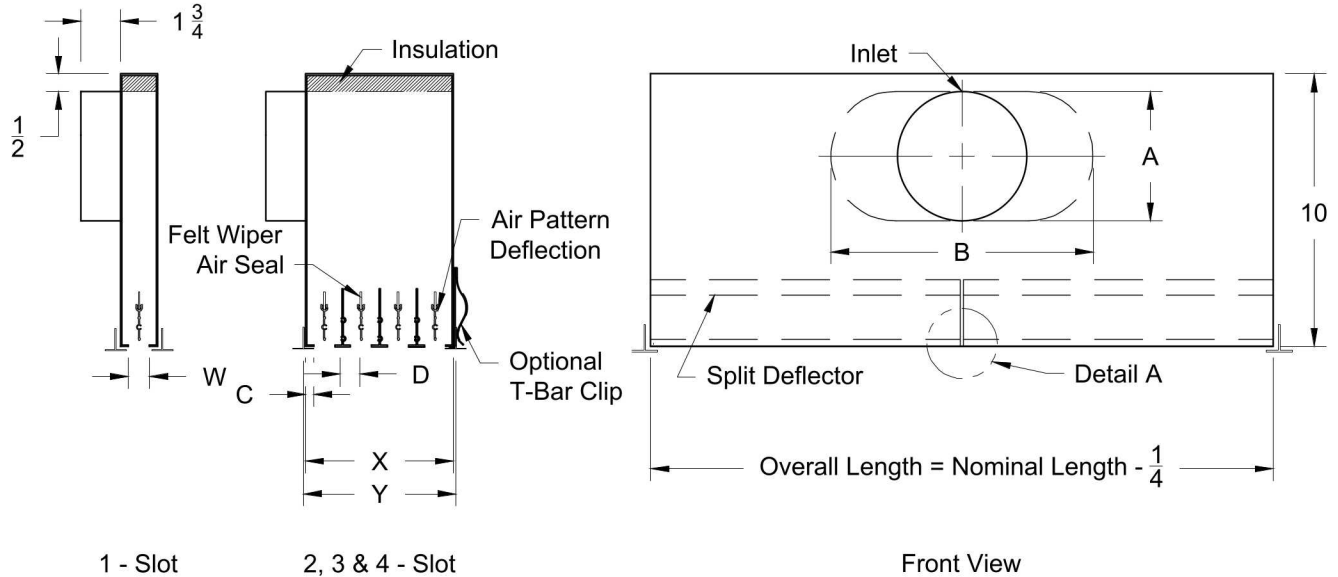

Inlet Chart			
Size	Type	A	B
6	Round	5 7/8	
8	Oval	5 7/8	8 15/16
10	Oval	5 7/8	12 1/16
12	Oval	5 7/8	15 1/4
14	Oval	5 7/8	18 7/16



MODELS	Slot (W)	1 Slot		2 Slot		3 Slot		4 Slot		Flange	Center Tee
		X	Y	X	Y	X	Y	X	Y		
PHPSI-50-6	1/2	1 1/2	1 3/4	3	3 1/4	4 1/2	4 3/4	6	6 1/4	1/2	3/4
PHPSI-75-6	3/4	1 3/4	2	3 1/2	3 3/4	5 1/4	5 1/2	7	7 1/4	1/2	3/4
PHPSI-10-6	1	2	2 1/4	4	4 1/4	6	6 1/4	8	8 1/4	1/2	3/4
PHPSI-15-6	1 1/2	2 1/2	2 3/4	5	5 1/4	7 1/2	7 3/4	10	10 1/4	1/2	3/4

1. Available Finishes

Standard Finish:
25 - White Tee/Black
26 - All White
27 - All Black

2. Available Accessories

ID - Quadrant Inlet Damper
LQ - Locking Quadrant Damper
ROD - Remote Operated Damper
TBPF - T-Bar Plaster Frame

3. Available Options

CC - 1/2" Closed Cell Insulation
EI - 1/2" External Fiberglass Insulation

3. Available Options


T-O - One Tee, Inlet Side
O-T - One Tee, Opposite Side
T-T - Two Tees, Both Sides
C-O - One Clip, Inlet Side
O-C - One Clip, Opposite Side
C-C - Two Clip, Both Sides
C-T - Clip Inlet, Tee Opposite
T-C - Tee Inlet, Clip Opposite
CN - Cross Notch
NB - No Blades

4. Construction Details


- Cross Notch: Available for 48" Only
 - Split Deflector, only available for the 36", 48" and 60" Units
 - Nominal lengths available: 24, 36, 48, 60
 - Available: 1, 2, 3 or 4 Slots
 - Steel Construction with Extruded Aluminum Tee's and Pattern Controller's
- All Dimensions $\pm 1/16"$

Model: PHPSI-6 EN Supply - Insulated - Lay In T-Bar - End Notch

PHPSI-6 - Lay In T-Bar - End Notch

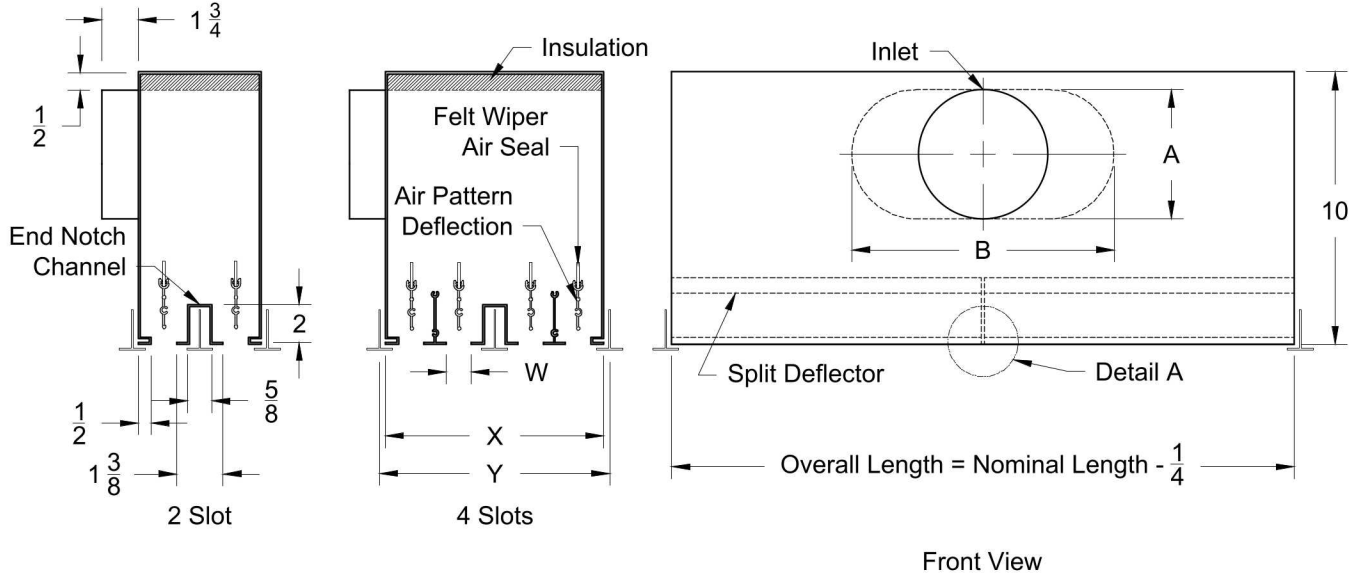

Inlet Chart			
Size	Type	A	B
6	Round	5 7/8	
8	Oval	5 7/8	8 15/16
10	Oval	5 7/8	12 1/16
12	Oval	5 7/8	15 1/4
14	Oval	5 7/8	18 7/16





MODELS	Slot (W)	2 Slot with End Notch		4 Slot with End Notch		Flange	Center Tee
		X	Y	X	Y		
PHPSI-50-6 EN	1/2	3 3/8	3 3/4	7 1/8	7 1/2	1/2	3/4
PHPSI-75-6 EN	3/4	3 7/8	4 1/4	8 1/8	8 1/2	1/2	3/4
PHPSI-10-6 EN	1	4 3/8	5	9 1/8	9 3/4	1/2	3/4
PHPSI-15-6 EN	1 1/2	5 3/8	6	11 1/8	11 3/4	1/2	3/4

1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
Standard Finish: 25 - White Tee/Black 26 - All White 27 - All Black	ID - Quadrant Inlet Damper LQ - Locking Quadrant Damper ROD - Remote Operated Damper TBPF - T-Bar Plaster Frame 3. Available Options CC - 1/2" Closed Cell Insulation EI - 1/2" External Fiberglass Insulation	T-O - One Tee, Inlet Side O-T - One Tee, Opposite Side T-T - Two Tees, Both Sides C-O - One Clip, Inlet Side O-C - One Clip, Opposite Side C-C - Two Clip, Both Sides C-T - Clip Inlet, Tee Opposite T-C - Tee Inlet, Clip Opposite CN - Cross Notch NB - No Blades	• Cross Notch: Available for 48" Only • Split Deflector, only available for the 36", 48" and 60" Units • Nominal lengths available: 24, 36, 48, 60 • Available: 1, 2, 3 or 4 Slots • Steel Construction with Extruded Aluminum Tee's and Pattern Controller's All Dimensions $\pm 1/16"$


Model: PHPSI-9

Supply - Insulated - Bolt Slot

PHPSI-9 - Bolt Slot

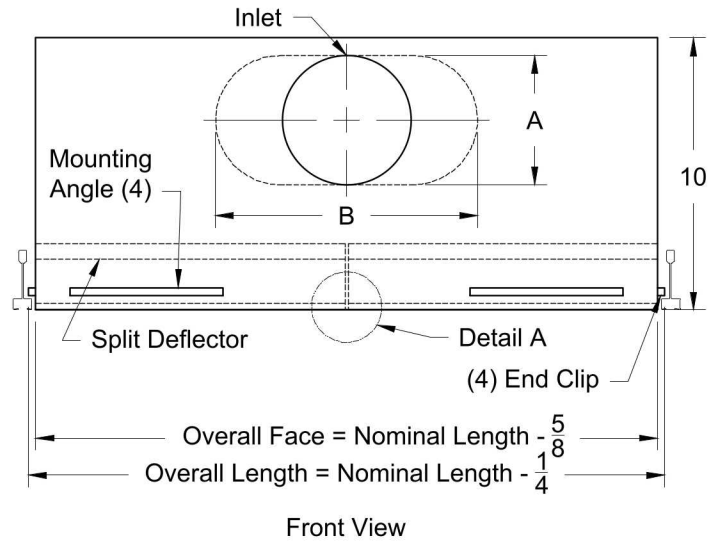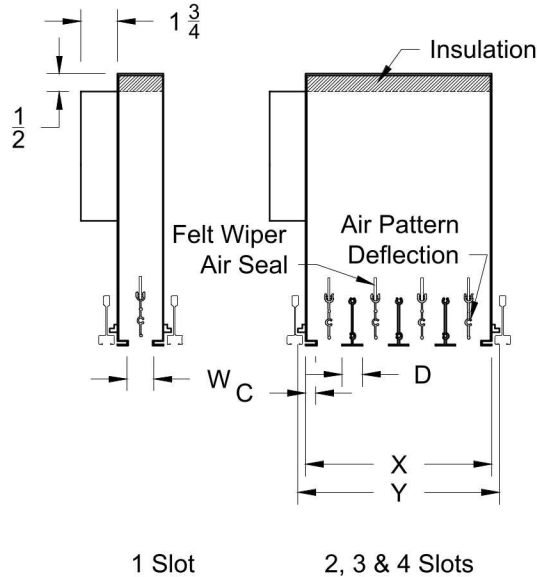

Inlet Chart			
Size	Type	A	B
6	Round	5 7/8	
8	Oval	5 7/8	8 15/16
10	Oval	5 7/8	12 1/16
12	Oval	5 7/8	15 1/4
14	Oval	5 7/8	18 7/16



MODELS	W	1 Slots		2 Slots		3 Slots		4 Slots		Flange	Center Tee
Supply		X	Y	X	Y	X	Y	X	Y	C	D
PHPSI-75-9	3/4	1 3/4"	2 3/8"	3 1/2"	4 1/8"	5 1/4"	5 7/8"	7"	7 5/8"	1/2	3/4
PHPSI-10-9	1	2"	2 5/8"	4"	4 5/8"	6"	6 5/8"	8"	8 5/8"	1/2	3/4
PHPSI-15-9	1 1/2"	2 1/2"	3 1/8"	5"	5 5/8"	7 1/2"	8 1/8"	10"	10 5/8"	1/2	3/4

1. Available Finishes

Standard Finish:
25 - White Tee/Black
26 - All White
27 - All Black

2. Available Accessories

ID - Quadrant Inlet Damper
LQ - Locking Quadrant Damper
ROD - Remote Operated Damper
TBPF - T-Bar Plaster Frame

3. Available Options


CN - Cross Notch
NB - No Blades
CC - 1/2" Closed Cell Insulation
EI - 1/2" External Fiberglass Insulation

4. Construction Details


- Cross Notch: Available for 48" Only
 - Split Deflector, only available for the 36", 48" and 60" Units
 - Nominal lengths available: 24, 36, 48, 60
 - Available: 1, 2, 3 or 4 Slots
 - Steel Construction with Extruded Aluminum Tee's and Pattern Controller's
- All Dimensions $\pm 1/16"$

Model: PHPSI-9 EN Supply - Insulated - Bolt Slot - End Notch

PHPSI-9 - Bolt Slot - End Notch

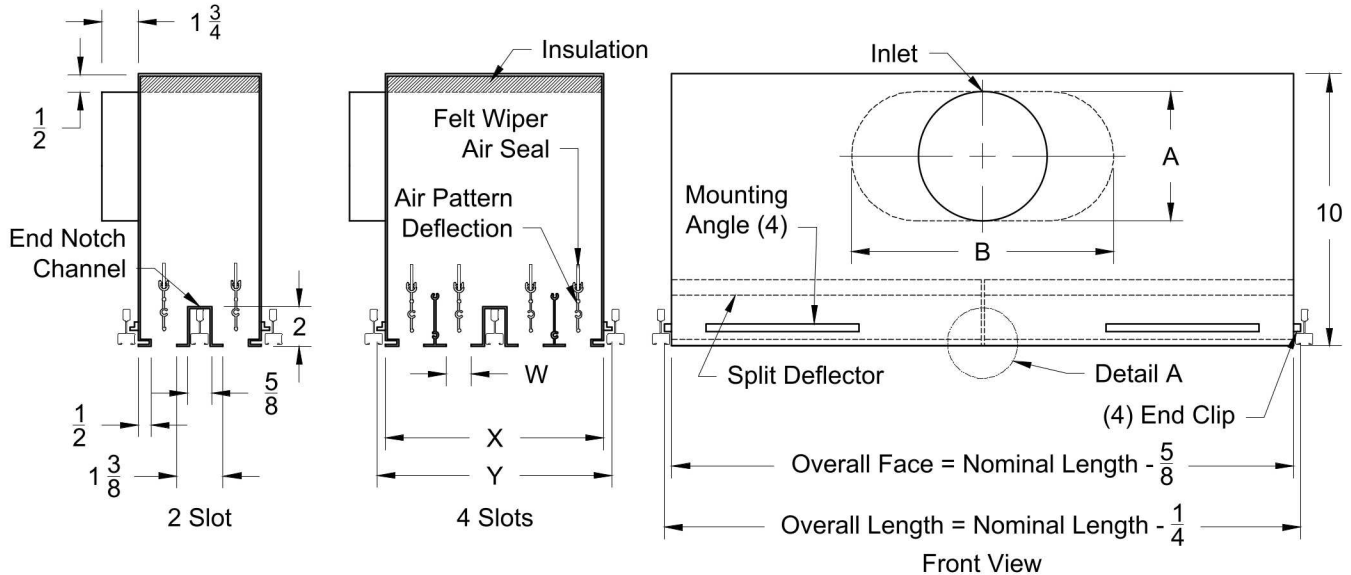

Inlet Chart			
Size	Type	A	B
6	Round	5 7/8	
8	Oval	5 7/8	8 15/16
10	Oval	5 7/8	12 1/16
12	Oval	5 7/8	15 1/4
14	Oval	5 7/8	18 7/16



MODELS	Slot (W)	2 Slot with End Notch		4 Slot with End Notch		Flange	Center Tee
		X	Y	X	Y		
PHPSI-75-9	3/4	3 7/8"	4 1/4"	8 1/8"	8 1/2"	1/2	3/4
PHPSI-10-9	1	4 3/8"	5"	9 1/8"	9 3/4"	1/2	3/4
PHPSI-15-9	1 1/2"	5 3/8"	6"	11 1/8"	11 3/4"	1/2	3/4

1. Available Finishes	2. Available Accessories	3. Available Options	4. Construction Details
Standard Finish: 25 - White Tee/Black 26 - All White 27 - All Black	ID - Quadrant Inlet Damper LQ - Locking Quadrant Damper ROD - Remote Operated Damper TBPF - T-Bar Plaster Frame	CN - Cross Notch NB - No Blades CC - 1/2" Closed Cell Insulation EI - 1/2" External Fiberglass Insulation	- Cross Notch: Available for 48" Only - Split Deflector, only available for the 36", 48" and 60" Units - Nominal lengths available: 24, 36, 48, 60 - Available: 1, 2, 3 or 4 Slots - Steel Construction with Extruded Aluminum Tee's and Pattern Controller's All Dimensions $\pm 1/16"$